
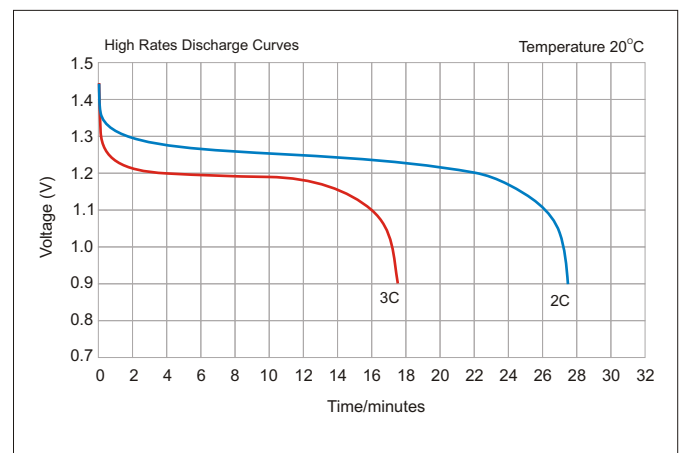
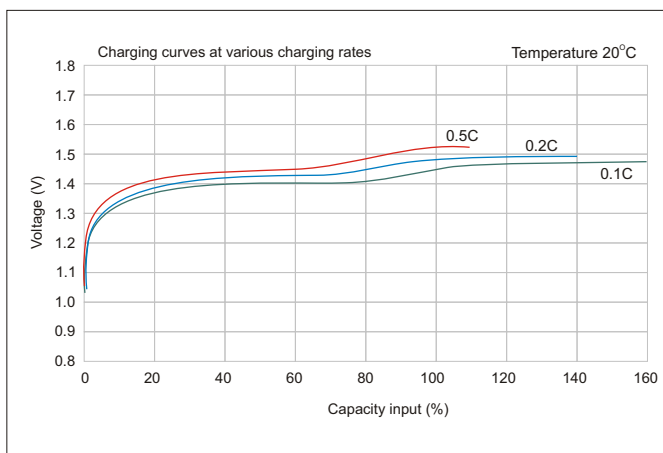


MH-10000D/HP Specification NiMH Cylindrical Battery Size: D

Typical Characteristics

Model: MH-10000D/HP		
Specifications		
Nominal Voltage (V)		1.2V
Capacity	Typical (mAh)	10000
	Minimum (mAh)	10000
Dimension	Diameter (mm)	32.5 $^{+0}_{-0.7}$
	Height (mm)	61.0 $^{+0}_{-1.0}$
Charging	Standard	1000mA x 16 hrs
	Rapid	2000mA x 7 hrs
	Quick	5000mA x 2.4 hrs -ΔV = 5mV
Operating Temperature (°C)	Standard Charging	0 ~ 40°C
	Rapid Charging	10 ~ 40°C
	Discharging	-10 ~ 50°C
	Storage	-20 ~ 30°C
Service Life	>500 cycles (IEC standard)	
Internal Resistance	< or = 8m Ohm (upon fully charged)	
Weight	Approx.167g	
Cuff-off Voltage (V)	1.00	

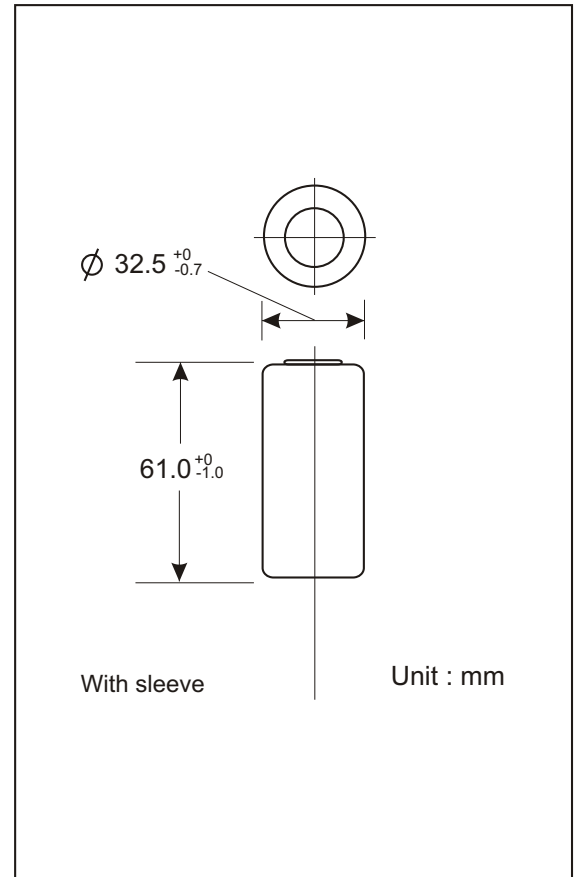

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.